

Gâches électriques

A p r i o r t a e l e t t r i c i

# Elektro-Türöffner

Electric strikes

Cerraderos eléctricos

**A04 SPECIAL STEEL ADHESIVE PLATE**




## A04 SPECIAL STEEL ADHESIVE PLATE

### A04 special steel adhesive plate for fixing the surface-mounted casing A01 to glazed doors and the mounting bracket A03 on the fanlight of fully glazed doors

The combination of the adhesive plate A04 and the surface-mounted casing A01 replaces the adhesive version A02. Furthermore, the adhesive plate A04 can be used for fixing the mounting bracket A03. A01 and A03 are supplied in a special steel finish.

In order to adhere special steel to glass, we supply our adhesive kit 843-8. This polyurethane adhesive has been specially developed for this application and ensures a secure bond between the materials.

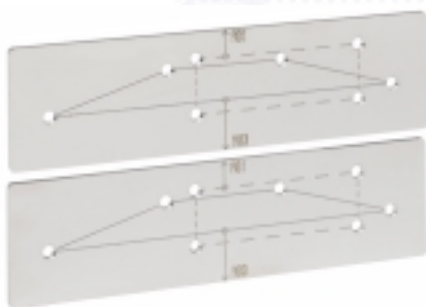

#### A04 comprising:

- 1 x adhesive plate EST
- 1 x screening plate
- 8 x fastening screws

Order no:

-----A0435-01



The surface-mounted casing A01 incorporates the escape door strike 331 as an escape route securing mechanism or the electric door strike 131 as a safety locking mechanism.

#### Adhesive kit 843-8 comprising:

- 310 ml polyurethane adhesive in cartridge
- 30 ml cleaner
- 30 ml primer
- Sanding pad
- Cleaning cloth
- Primer applicators
- Cartridge nozzle
- Fixing adhesive pads
- and one set of directions for use
- (sufficient for adhering approx. 5 x A04 plates)


Order no:

843-8-----00



| Technical data                            |  |
|---|--|
| Dimensions A04                            | 165 x 45 x 3 mm<br>Corner radius 2 mm              |
| System fatigue test                       | 250,000 cycles<br>140 N load per cycle open/closed |
| Holding power                             | 6000 N   |
| Glass pane spacing for fully glazed doors | 0 to max. 10 mm                                    |
| Adhesive plate spacing                    | 2 mm to 6 mm                                       |

## A04 SPECIAL STEEL ADHESIVE PLATE

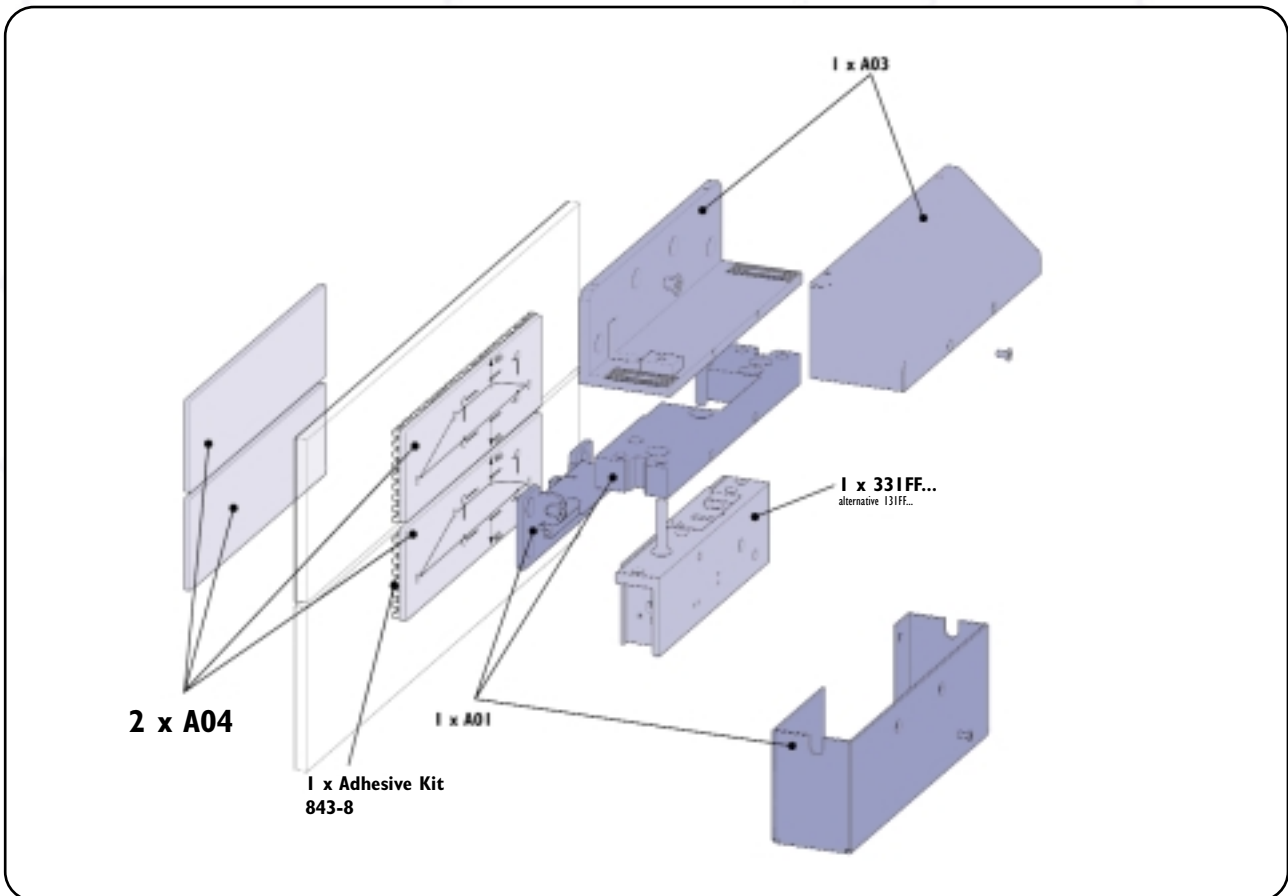


**System assembly for a  
glazed door  
with steel or wooden frame**



1x A04  
1x A01  
1 x 331FF-----F94 or other variants  
331FF..DL or 131FF..DL  
1x 843-8..

**System assembly for a  
fully glazed door**



2x A04  
1x A01  
1x A03  
1 x 331FF-----F94 or other variants  
331FF..DL or 131FF..DL  
1x 843-8..

Gâches électriques

A p r i o r t a e l e t t r i c i

# Elektro-Türöffner

Electric strikes

Cerraderos eléctricos

effeff Fritz Fuss GmbH & Co.  
Kommanditgesellschaft auf Aktien  
Bildstockstraße 20  
72458 Albstadt  
GERMANY  
Tel. +49 7431 123-0  
Fax +49 7431 123-240  
info@effeff.com  
www.effeff.com



2.1901-050.060.00